





















LG1

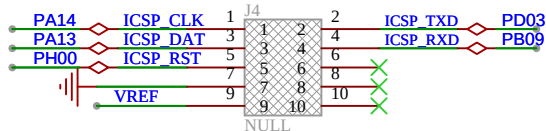

显示模式: TN反射正显灰膜
驱动条件: 3.3V, 1/4Duty, 1/3Bias
视角: 6
温度范围: -20,70度工作, -30,80度储存
尺寸: 长30.0*宽15.0mm, 反射模式

LG2

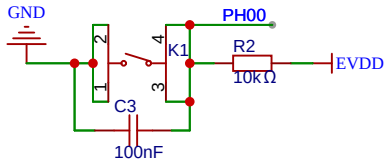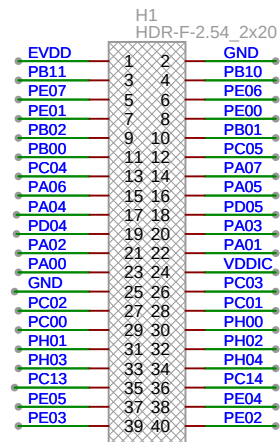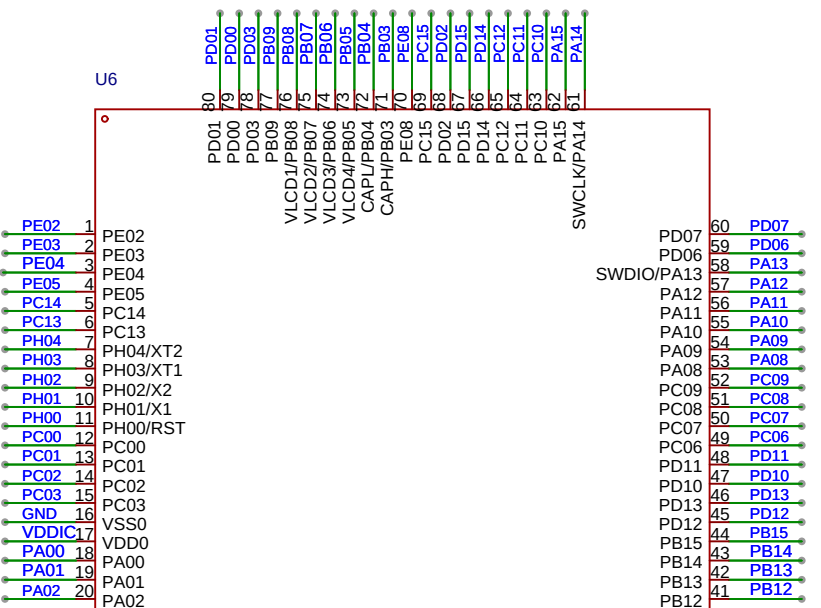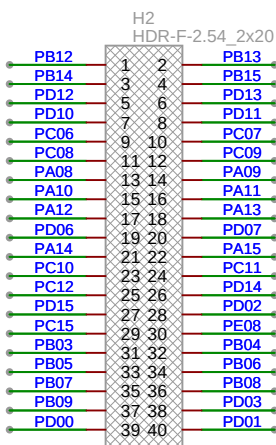

Schematic	SCH_EVB_BAT32G129		Update Date	2025-04-01	
			Create Date	2025-03-27	
Page	BAT32G129-EVB		Part Number		
Drawed		EVB_BAT32G129_EVB			
Reviewed					
		VER	SIZE	PAGE	2 OF 2
		V1.0	A3	嘉立创EDA	

